

WORKHORSE™ *"Color-Coordinated Low Slope Membrane—
To Complement Your Shingle Roof"*

ROOFMatch™

APP & SBS Granule Surfaced Modified Bitumen Membrane


Colors shown are available in APP & SBS Modified Bitumen Membrane




**GREAT FOR
MATCHING
LOW SLOPE
AREAS WITH
SHINGLE
APPLICATIONS**



Weathered Wood Blend

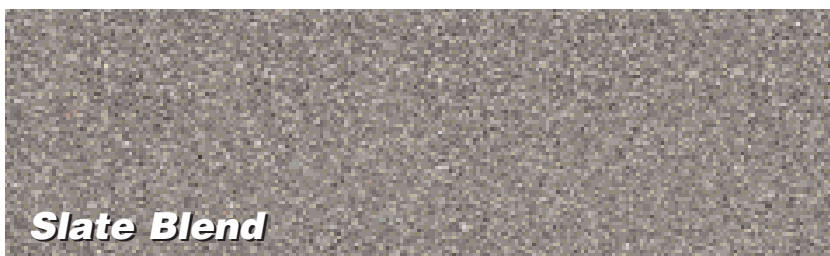

Slate Blend

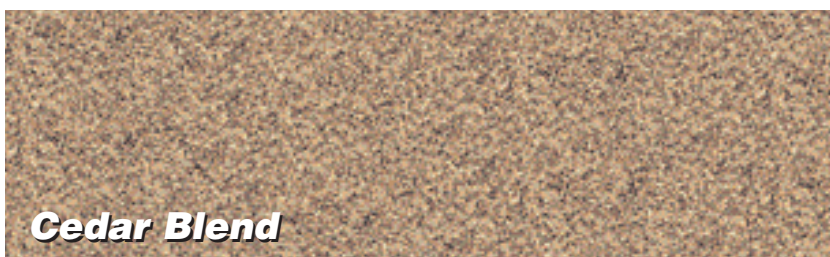


Cedar Blend



Burnt Sienna Blend



**IDEAL
FOR
INDUSTRIAL
APPLICATIONS**

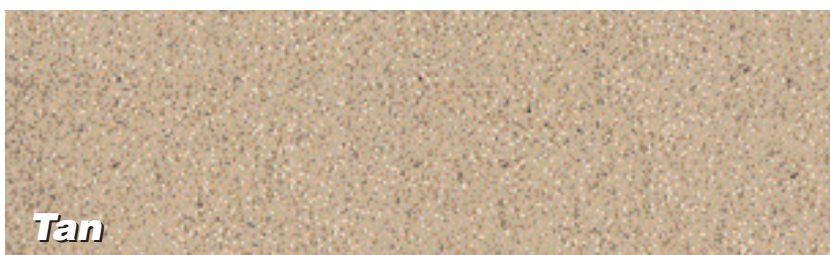

Tan

Please Note: It is difficult to reproduce the color clarity and actual color blends of these products. Before selecting your color, be sure to see a full-sized roll.

Distributed By:



WORKHORSE™ *"Color-Coordinated Low Slope Membrane—
To Complement Your Shingle Roof"*

ROOFMatch™

APP & SBS Granule Surfaced Modified Bitumen Membrane



OUTSTANDING APPEARANCE

- **Five popular Timberline® Series color-coordinated colors...** to complement industrial, commercial, and residential shingle applications
- **Architecturally distinctive...** accentuates the beauty of brick, wood, stucco and other popular exteriors

SUPERIOR PERFORMANCE

- **Made with modified asphalt...** for long-lasting performance in all climates
- **Strong polyester mat...** for maximum resistance to tearing and splitting
- **Rugged design...** stands up well to regular roof maintenance

PEACE OF MIND

- **Fire resistant...** for use in UL Class A assemblies
- **Backed by Building Materials Corporation of America...** North America's largest roofing manufacturer

CHOICE OF APPLICATION

- **Hot-mop SBS application...** especially good for commercial and industrial applications
- **Cold adhesive SBS application...** convenient; great where asphalt fumes are unacceptable
- **Heat-welding APP application...** excellent adhesion; good in cooler weather; no kettle required

PRODUCT SPECIFICATIONS (nominal)

ROOFMatch™ APP Granule

Code Approvals	UL, FM, Miami Dade
Roll Size	1 square 39 3/8" x 32'9" (1m x 10m)
Thickness	4.0 mm (157 mils)
ASTM Listing(s)	D-6222 Type I Grade G
Reinforcement	Polyester

ROOFMatch™ SBS Granule

Code Approvals	UL, FM, Miami Dade
Roll Size	1 Square 39 3/8" x 32'9" (1m x 10m)
Thickness	3.9 mm (154 mils)
ASTM Listing(s)	D-6164 Type I Grade G
Reinforcement	Polyester

Distributed By:

U.S. INTEC®



Manufactured by BMCA.
1361 Alps Road • Wayne, NJ 07470
(800) ROOF-411 • www.gaf.com or (800) 624-6832 • www.usintec.com
©2006 Building Materials Corporation of America 7/06

COMGN170

RoofMatch™ is the brand name for GAF Ruberoid® Mop and Torch Granule colors.

73003-1202